

MANIACCESS


■ **100 SC**
120 SC





Self-propelled rough terrain scissor lift


- Working height: 9.92 to 11.75 m
- Platform height: 7.92 to 9.75 m
- S.W.L.: 567 kg (100 SC)
454 kg (120 SC)
- Extension of the platform: 1.10 m
- Platform size: 2.51 mx1.55 m
- Diesel Engine 25 hp
- 4 wheel drive
- Brake on 4 wheels
- Proportional controls


100 SC / 120 SC


	100 SC	120 SC
 Working height.....	9.92 m	11.75 m
Platform height	7.92 m	9.75 m
S.W.L.....	567 kg	454 kg
Occupancy of platform (int/ext).....	4/4	4/2

 Max. wind speed (for external use).....	45 km/h
Platform dimensions.....	2.51 x 1.55 m


 ① Width.....	1.73 m
② Length with stab. / without stab.....	3.43/2.67 m
③ Length with extension.....	4.19 m
④ Height.....	2.32 m 2.57 m
⑤ Height rails lowered	1.70 m 1.83 m

 ⑥ Ground clearance.....	0.20 m
⑦ Wheelbase	1.85 m
Inside turning radius.....	1.52 m
Outside turning radius.....	3.68 m
Working speed	0.8 km/h
Travelling speed	6.1 km/h
Speed raise / lower	30/35 s 40/37 s

 EngineKubota D-1105 - 25 hp

 Gradeability on rough terrain	35 % 30 %
------------------------------------------------------------------------------------------------------------------------	--------------

 Hydraulic tank.....	62.5 l.
Diesel tank	56.8 l.

 Foam filled tyres	30 x 60 cm
4 wheel drive / 2 wheel steer	




 Weight.....	3746 kg 4254 kg
with foam filled tyres, with stab.	

Standard equipment

- Automatic levelling stabilizers
- Proportional controls
- Foam filled tyres
- Non slippery floor deck
- Swing gate for easy access to platform
- Folding guardrails
- On board diagnostic
- Removable control box
- 220 V predisposition
- Horn
- Audible and visual tilt and overload alarm
- Descent alarm

Options

- Airline predisposition
- Working lights
- Special paint
- Non marking tyres
- Biodegradable oil
- Flashing beacons

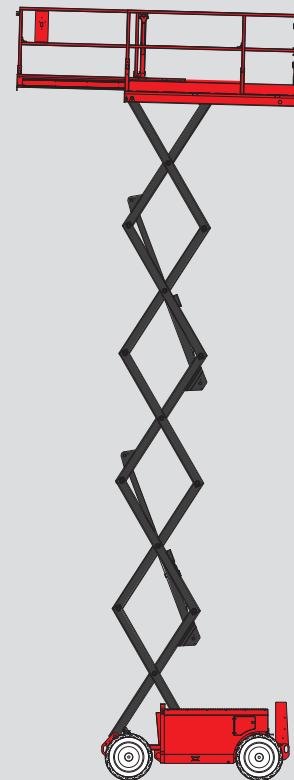

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700xxxEN_BAUMA_0310_120SC.qxd

